

# Lumen® SASE Solutions

**Versa VM in Azure Overview**  
**August 2024**

---

---

## General disclaimer

Although Lumen has attempted to provide accurate information in this guide, Lumen does not warrant or guarantee the accuracy of the information provided herein. Lumen may change the programs or products mentioned at any time without prior notice. Mention of non-Lumen products or services is for information purposes only and constitutes neither an endorsement nor a recommendation of such products or services or of any company that develops or sells such products or services.

ALL INFORMATION PROVIDED IN THIS DOCUMENT IS PROVIDED "AS IS," WITH ALL FAULTS, AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED OR STATUTORY. LUMEN AND ITS SUPPLIERS HEREBY DISCLAIM ALL WARRANTIES RELATED TO THIS GUIDE AND THE INFORMATION CONTAINED HEREIN, WHETHER EXPRESSED OR IMPLIED OR STATUTORY INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT, OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

LUMEN AND ITS SUPPLIERS SHALL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR REVENUES, COSTS OF REPLACEMENT GOODS OR SERVICES, LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OF THE GUIDE OR ANY LUMEN PRODUCT OR SERVICE, OR DAMAGES RESULTING FROM USE OF OR RELIANCE ON THE INFORMATION PROVIDED IN THIS GUIDE, EVEN IF LUMEN OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any internet protocol (IP) addresses and other information used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

Many of the Lumen products and services identified in this guide are provided with, and subject to, written software licenses and limited warranties. Those licenses and warranties provide the purchasers of those products with certain rights. Nothing in this guide shall be deemed to expand, alter, or modify any warranty or license or any other agreement provided by Lumen with any Lumen product, or to create any new or additional warranties or licenses.

---

## Overview

This document provides an overview of the steps you need to complete in your Azure environment in the support of a Lumen SASE Solutions branch VM deployment. Lumen SASE service delivery will not have access to configuration steps within MS Azure and can only assist in the Versa VM additional configuration after you successfully deploy the virtual instance(s) and connect it to the management plane (Versa Director).

Topics covered in this document:

- Overview of design topologies with internet WAN connectivity.
- Completing the TDG form in SASE Manager.
- Configuring Azure from the SASE Manager.
- Connecting to host/application VNets with Azure Route Server.
- Final configuration and validation.

You are required to have your own Azure infrastructure account and must complete all Azure steps to support the VM deployment. Your account should have, but be not limited to, a VNet with associated CIDR block, Internet gateway, security groups, and route tables.

**NOTE:** Lumen is providing an automated deployment process and templates within SASE Manager to assist in the required steps and resources to deploy a virtual instance.

Design only supports 1 WAN and LAN interface. The primary use cases for this deployment are as part of an SD-WAN overlay connecting Azure resources to the remainder of the network and/or as part of a secure web gateway for remote connections. It is not recommended as an in-bound firewall for all Azure resources.

You are responsible for all charges within your Microsoft Azure account for resources related to the deployment of the Lumen SASE VM or virtual instance.

# Design topologies

Lumen recommends that you establish a separate VNet to host the VMs in your Azure environment. Figure 1 below shows a brief overview of each deployment.

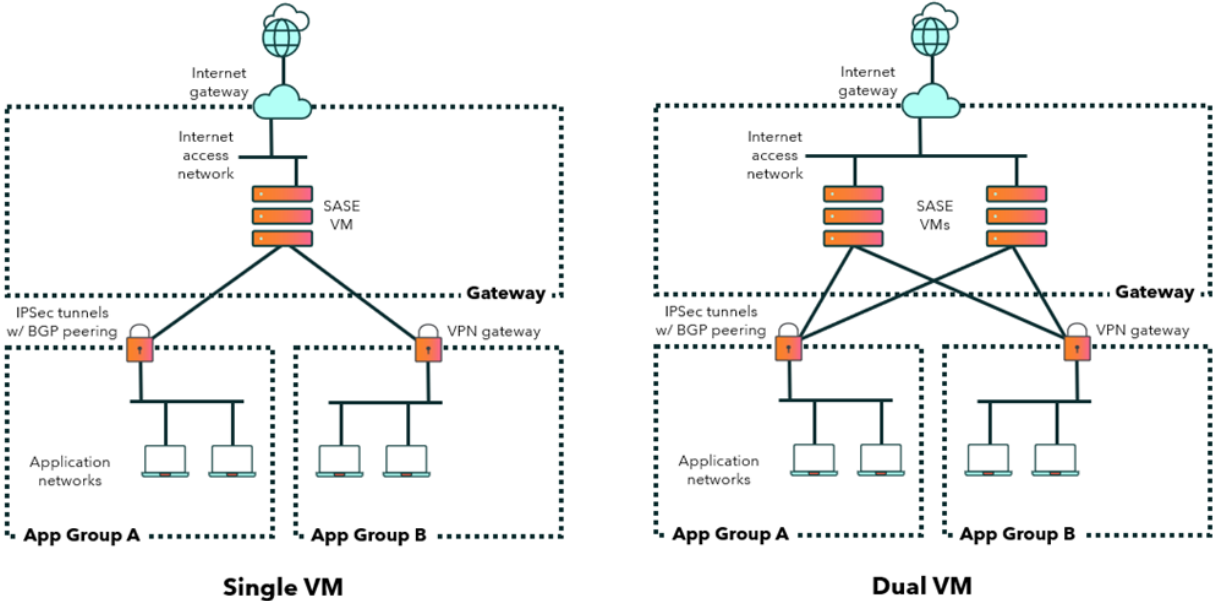



Figure 1: Cloud deployment topologies

**NOTE:** Lumen does not sell a packaged high availability for virtual instance. To deploy with dual appliances, you need to purchase two virtual instances.


## Deployment requirements and overview

### Step 1 - Complete the TDG form in the SASE Manager

1. OPTIONAL - To view what services are available to deploy, click **Manage** (in the **SASE Settings** section).

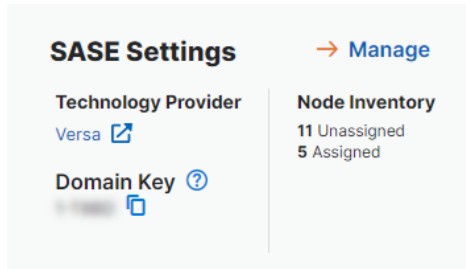


2. On this screen, you can view all the available SASE instances that are available to configure.

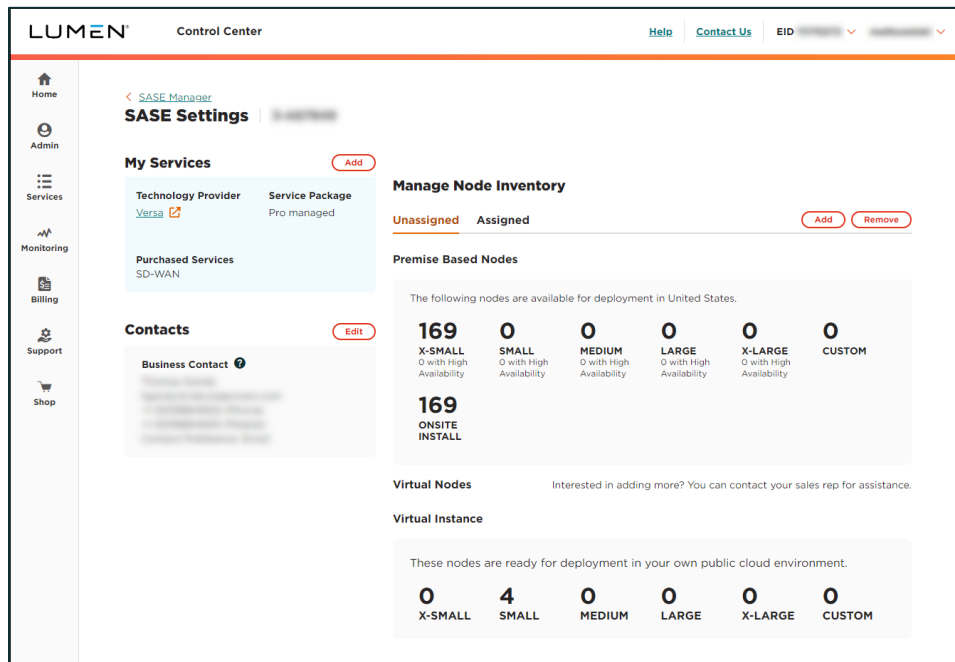


3. When ready, click **Configure Node** on the SASE Manager dashboard.


- Now, select what type of SASE node to configure. For VM in Azure, click **select** (on the **Virtual Instance Node** tile).

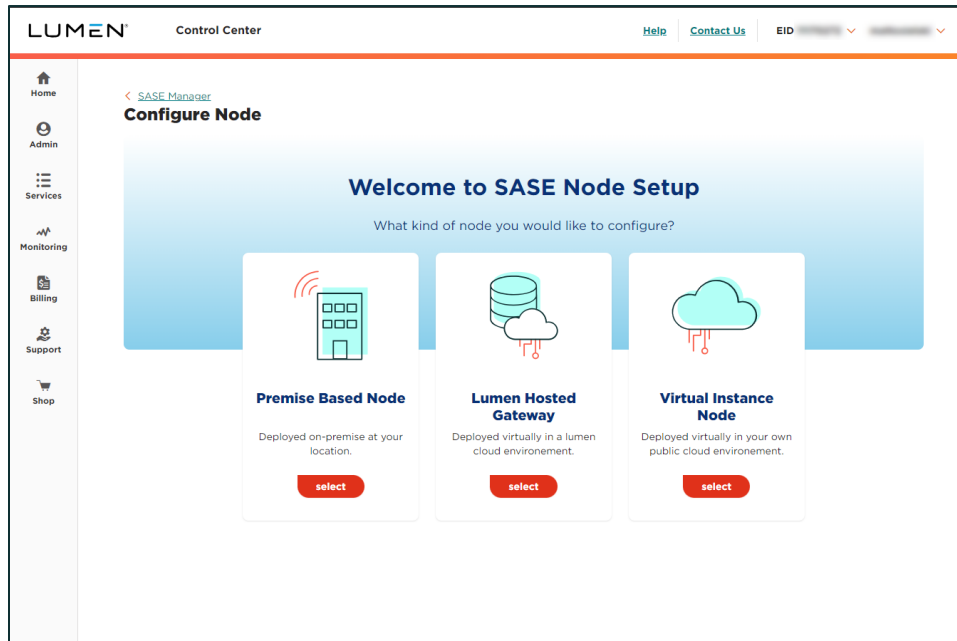

- Select the size of VM you are deploying, select the cloud provider, then click **CONTINUE**.

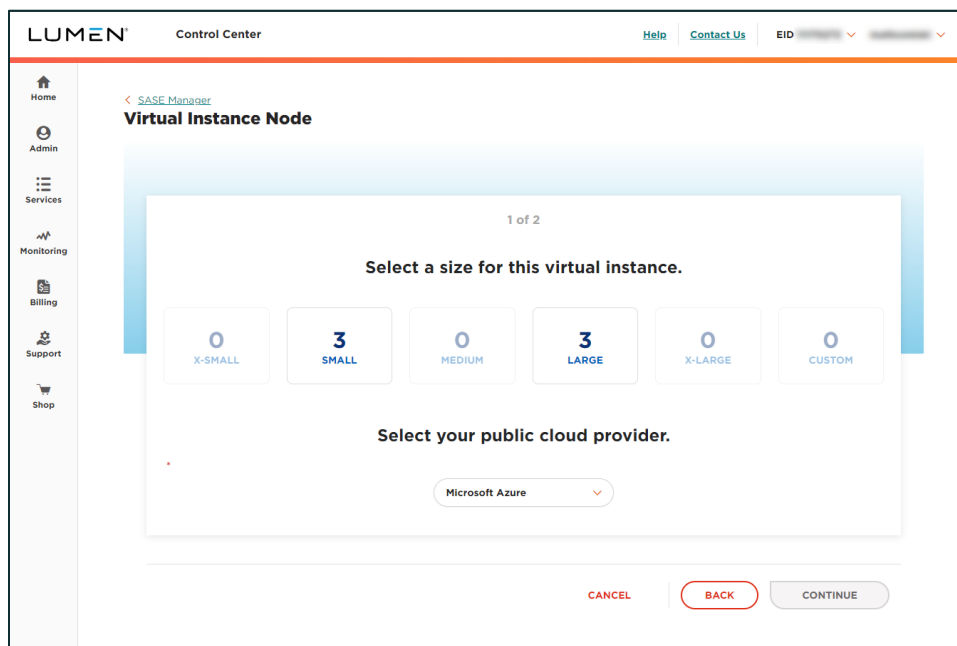

- Select or add a new contact. (This should be the best contact to work with on the VM deployment.)

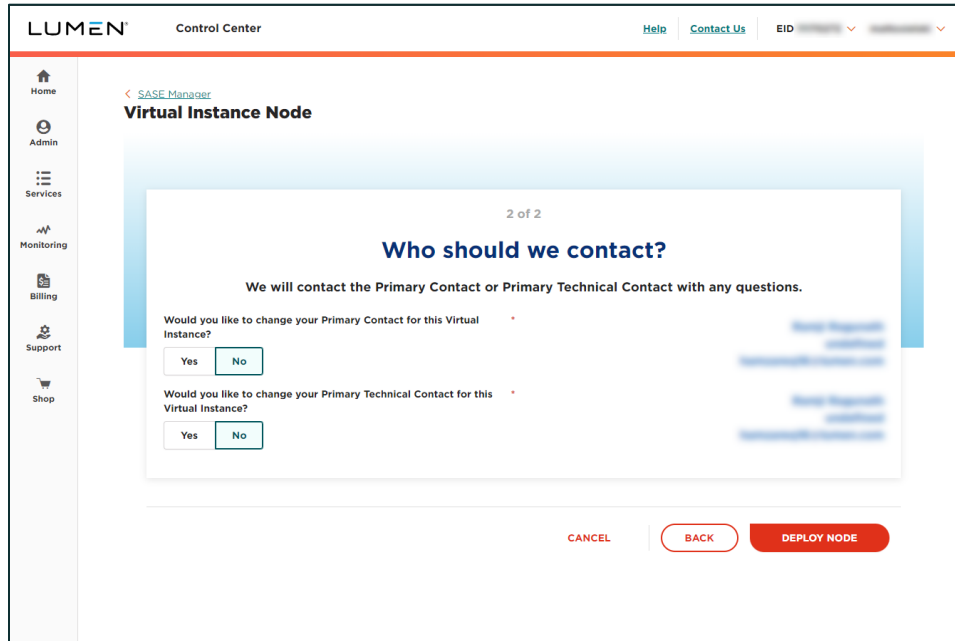


- To begin the process of creating the VM instance, click **DEPLOY NODE**.  
**NOTE:** This step prepares the VM data and automation for the deployment. To start the automated process into the Azure environment, continue to step 2 (below).

## Step 2 - Configure Azure in SASE Manager


The next step is to complete the "Azure Config" step within the SASE Manager to deploy the VM into your Azure environment. Please make sure to wait at least 15 minutes after completing step 1 above to move to step 2. The node status will also change to *Action Required*.

**NOTE:** The person completing this step should have the appropriate Azure login and management credentials as this step will interact with your Azure account.

- You will first see the Azure instance created in Step 1 on the homepage of SASE Manager (within Control Center) with a status of *ACTION REQUIRED*.

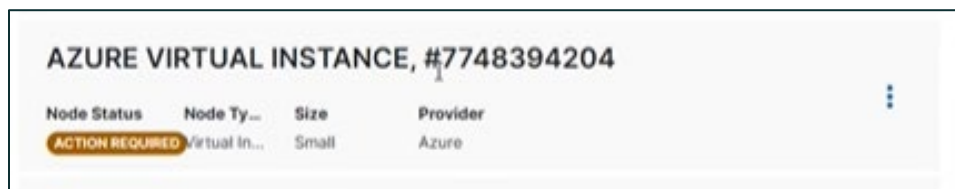

2. Click on the 3-dot icon, then select **Azure Config**.

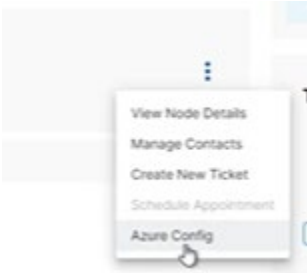

3. In the window that appears, type the login credentials for your Azure account.

A screenshot of the 'Custom deployment' form in the Azure portal. The form is titled 'Custom deployment' and has a subtitle 'Deploy from a custom template'. It features a navigation bar with 'Basics' and 'Review + create' tabs. Below the navigation bar, there is a 'Template' section with a warning message: 'Ensure that the source of the template is trustworthy. Deploying a template from untrustworthy sources can result in your cloud environment being compromised.' The 'Project details' section includes fields for 'Subscription' (Application Marketplace Non Prod), 'Resource group' (with a 'Create new' link), 'Region' (East US 2), 'Instance Type' (Standard\_D4s\_v3), 'Vnet New Or Existing', 'Vnet Name', 'Vnet Address Prefix', 'Fortigate External Subnet Prefix', 'Fortigate External Subnet Start Address', 'Fortigate Internal Subnet Prefix', and 'Fortigate Internal Subnet Start Address'. At the bottom, there are three buttons: 'Previous', 'Next', and 'Review + create'.



- 
4. Complete the form as follows:
    - a. Select the subscription and resource group to create the VM into. (A new resource group can be created here, if required.)
    - b. Validate/populate the region for the VM. (**NOTE:** Not every resource is available in every region.)
    - c. Select the instance type. (For each VM size, Lumen defaults to a recommended value, but you can choose any valid size from the list. See the VM Sizing appendix for more details.)
    - d. Select VNet New or Existing. (Lumen recommends deploying VMs into a new VNet and then creating connections to host VNets as defined in the next section below. First instance goes into new VNet and if a second is ordered, it can be added to the existing newly created VNet on the previous build.)
    - e. If a new VNet, provide a name for the VNet or a default name will be used.
    - f. Populate the VNet address prefix. This will be the subnet for an existing VNet or enter a new subnet if creating a new VNet (e.g., 10.1.0.0/16).
    - g. Type the Versa external subnet prefix and the Versa external subnet start address. This is the subnet 1 WAN prefix and start address. This should be the subnet of the Azure public IP. Use the desired IP address for the WAN port of the VM as the subnet start address. **NOTE:** You must have created and have available a public static IP address that can be assigned to this VM deployment.
    - h. Type the Versa internal subnet prefix and the Versa internal subnet start address. This is the subnet 2 LAN prefix and start address. Set the desired LAN subnet and start address.
  5. When you're done, click **Review + create**.

This starts the automated process to deploy the VM. This process may take up to 15 minutes to complete.

## Connecting to host VNets with Azure Route Server

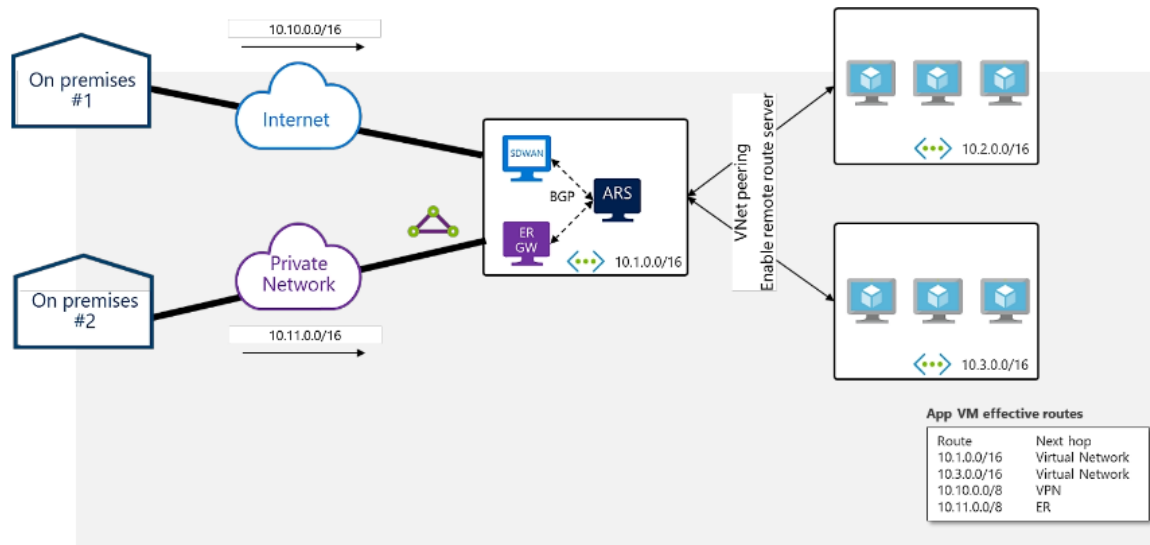


Figure 2: Azure Route Server

Azure Route Server allows you to set up dynamic routing between your network appliances and the gateways in Azure. Azure Route Server provides border gateway protocol (BGP) endpoints using standard routing protocol to exchange routes.

For more information and instructions on setting up Azure Route Server, please see the following resources:

- [Azure Route Server overview](#)
- [Azure Route Server documentation](#)

**NOTE:** You are responsible for all Microsoft Azure charges related to the deployment of the Lumen SASE VM or virtual instances. Azure Route Server will incur additional charges that you are responsible for in your Azure environment.

## Alternative approach: Connecting to host/application vNets using IPsec tunnels

In these designs, you use WAN internet connectivity into your cloud environment. Figure 3 below shows an overview of the single VM or dual VM deployment topologies.

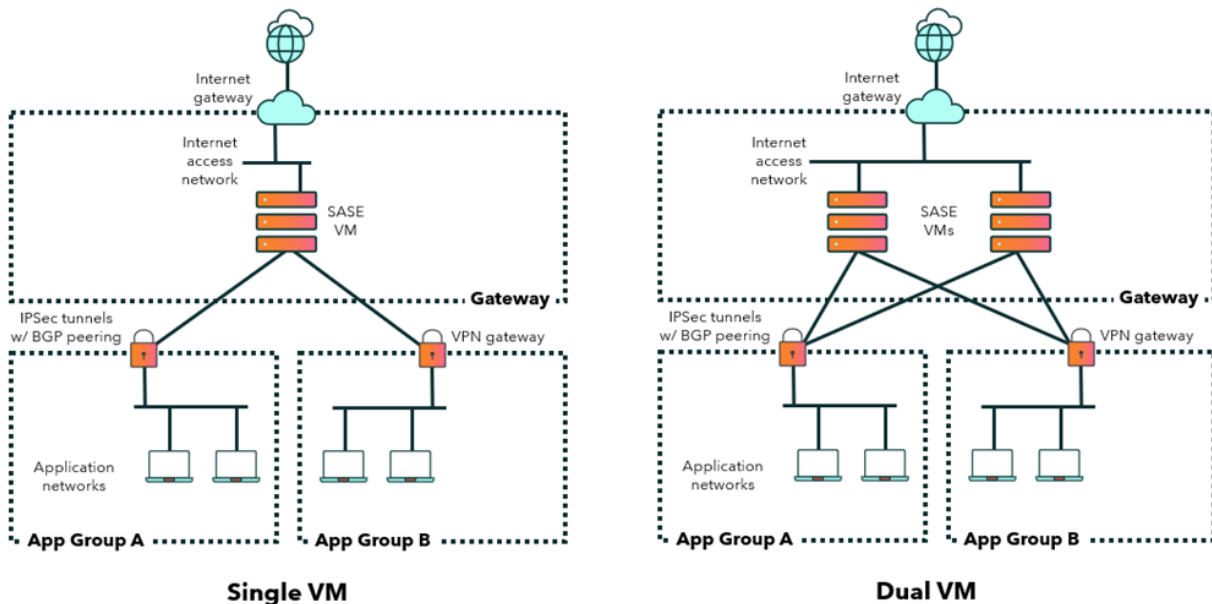


Figure 3: Connecting VNets with IPsec

## Summary of steps for you to connect to host/application vNets

For the internet deployment topologies, below is a summary of the steps you must complete to configure/deploy this.

**NOTE:** The person completing these steps should have MS Azure configuration access to connect the deployed SASE virtual instance to the host/application vNets. Lumen SASE service delivery will only have access to assist and configure the Versa VM side of the deployment.

1. Create local network gateways: This step defines the SASE virtual instances as your VPN gateways that can be used by the VNGW:
  - a. Navigate to **Local Network Gateways** and click the **+** to add a local gateway.
  - b. Provide a unique name, public IP assigned to the SASE virtual instance, the IP subnet in slash notation of the LAN port of the SASE virtual instance, check **Configure BGP**, enter the AS number used in the LAN-VR of the SASE virtual instance (64514 by default), enter the LAN IP address of the SASE virtual instance and select the appropriate resource group.
  - c. Click **Create** to start the deployment process.
  - d. Repeat the above steps for the second virtual instance.
2. Create VNGW: You must create a VNGW in each Host VNet that will use the SASE virtual instances.
  - a. Navigate to the **Virtual Network Gateways** blade and click the **+** to create a new VNGW.

- b. Provide a name, select a region, select **VPN** as the gateway type, select **Route-based** for VPN type, select the appropriate SKU (do not use Basic) and select the appropriate Host VNet from the list.
  - c. For active-backup mode, create a new IP and provide a name, leave **Enable active-active mode** set to **Disabled**, enable **Configure BGP ASN** and enter the AS number that will be assigned to the VNGW. This will be used as the peer-as in the SASE virtual instances.
  - d. For active-active mode, create a new IP and provide a name, click **Enable active-active mode**, create a new, second public IP and provide a name, enable **Configure BGP ASN** and enter the AS number that will be assigned to the VNGW. This will be used as the peer-as in the SASE virtual instances.
  - e. Click **Review + create** to run a validation, then click **Create** to begin the VNGW deployment. This process can take considerable time (Azure advises up to 45 minutes).
- Note:** This step creates a gateway subnet in the Host VNet that is used to associate the VNGW, BGP sessions and routes to. This subnet will use the next available IP range out of the CIDR for the VNet.
3. Create connections: This step will create the IPSec connections and BGP sessions between the VNGW and SD-WAN appliances.
    - a. Navigate to **Virtual Network Gateways** and select the VNGW created in the last step.
    - b. Select **Configuration** and ensure the VNGW is in the correct mode. Ensure the correct BGP ASN is configured and make a note of the BGP peer IP address(s). This information will be required to configure the SASE virtual instance and will need to be provided to Lumen personnel.
    - c. Select **Connections**, then click the **+** to add a connection.
    - d. Provide a unique name, select **Site-to-Site (IPSec)** for the connection type, select a local network gateway from the list, type a pre-shared key, then click **OK** to create the connection. The pre-shared for each connection is required to configure the SASE virtual instance and will need to be provided to Lumen personnel.
    - e. Once created, navigate back to **Virtual Network Gateways**, select **Connections**, click on the connection you just added, click **Configuration** and ensure BGP is enabled. If this changes, click **Save** at the top of the blade.
    - f. Repeat the above steps to create the connection(s) to the second virtual instance.

**Note:** If you have additional host VNets that will use the SASE virtual instances, repeat the above steps for each host VNet. A maximum of five host VNets can be supported by a pair of SASE virtual instances due to limitations with the allowed number of WAN based IPSec tunnels. Only ten WAN-based IPSec tunnels are allowed per appliance and with the VNGWs in active-active mode with two IPSec tunnels active, that allows for five host VNets.

## Final configuration and setup

- Lumen SASE Service Delivery can work with you on any additional configuration requirements related to the Versa virtual instances.
- You also have access to the Versa virtual instances via SSO to Versa Director in SASE Manager.

## Appendix: VM sizing

The following table represents the VM sizes that are available and are standard Azure VM sizes. The size of the VM you choose should be based on the desired throughput and interfaces required.

**NOTE:** Lumen recommends using Standard\_F4s due to the similar throughput numbers and requirement for 3 NICs for the minimum design. Using larger VMs will drive additional cost to your Azure account.

**NOTE:** Azure Accelerated Networking is not supported on the current release of FlexVNF running Ubuntu 14.x. Lumen recommends using the small VM rather than the medium and large VMs to prevent incurring unnecessary charges. Versa projects that throughput size limitations can be overcome as part of Versa 22.1, which is supposed to have an Azure-compliant version of DPDK.

vCPE size	Throughput bandwidth	Cores	RAM	Disk	NICs	VM NIC type	CPU type	Cloud provider designation
Small-FlexVNF	187 Mbps	4	8 GB	16 GB	4	1 or 2	Intel Sandy or better	Standard_F4s
Medium-FlexVNF	157 Mbps	8	16 GB	32 GB	8	1 or 2	Intel Sandy or better	Standard_F8s
Large-FlexVNF	178 Mbps	16	32 GB	64 GB	8	1 or 2	Intel Sandy or better	Standard_F16s